



MAKINEX®

**TOOL AND POWER
INNOVATION COMPANY**

MAKING INEFFICIENCIES EXTINCT



JUNE 2025



MAKINEX®

We are the Tool and Power Innovation Company

Since 2004 Makinex has been designing tools and equipment that is innovative and award-winning. It is this cutting-edge dedication to providing products that are faster, safer and easier to use that sets us apart.

All our products are carefully researched and pre-tested to meet the needs of the toughest industries in the world – construction, rental, flooring, concrete, landscaping and related industries.

We pride ourselves on designing, manufacturing and distributing unique products that enhance productivity, save time and decrease physical effort.

Table of Contents

Our Innovation Range	1
Dual Pressure Cleaner	2
Dual Pressure Washers	3
Hose2Go	4
Concrete Grinder	5
Mixing Stations.....	6-7
Jackhammer Trolley.....	8
Tile Smasher Heads and Accessories	9
Powered Hand Truck	10
Mobile Charge Pod	11
Portable Power Boxes	12-13
Generators.....	14-15
Connect with Makinex	16
Our Awards	17



OUR INNOVATION RANGE

Surface Cleaning



Surface Preparation



Lifting and Loading



Power Solutions



DUAL PRESSURE CLEANER 2200 (DPC)

DPC-2200-US



FEATURES



Spray Gun and Wand



Rotary Cleaner



Telescopic Handle



Lightweight



Briggs & Stratton Gasoline Engine

2 in 1 Pressure Cleaner – Cleans 3x Faster

Redefining cleaning power. Combining a pressure wand and rotary surface cleaner, the DPC delivers 2200 psi control all in one machine. It blitzes through dirt and grime at 3x the speed, outshining its rivals. With a mere 88lbs weight, it's compact, lightweight, and versatile – a dynamic companion for driveways, walls, and ceilings. This 2in1 marvel seamlessly toggles between rotor and wand through a single handle turn. Whirl a way, pump, and engine merge into a compact powerhouse. Conquer tough spots with the telescopic adjustable handle.

Ideal For

- Vertical and horizontal cleaning
- Cleaning outdoor areas including tennis courts
- Cleaning driveways, paths, exterior surfaces
- Cleaning outdoor furniture
- Cleaning vehicles, motorbikes and trailers



Specifications 2200

Dimensions (compact)	L 2ft 8in x W 1ft 6in x H 3ft 4in
Weight	88lbs
Hose length	32ft, 9in
Sound level at handle	80 dBA full load @ 3,600 rpm
Gas engine	Briggs & Stratton
Fuel tank capacity	8.8G
Fuel	Unleaded 86 octane or higher
Pump	AR Triplex with gear reduction, internal bypass unloader, thermal release valve
Pressure range	1000 to 2200 psi
Rotary size	18in

DUAL PRESSURE WASHER 2500 AND 4000 (DPW)

DPW-2500-0A-VU-50
 DPW-2500-0A-HU-50
 DPW-4000-0A-VU-50

2 in 1 Commercial Pressure Cleaner – Cleans 3x Faster

Your Ultimate All-in-One Pressure Washing Solution. This remarkable machine combines a pressure wand and rotary cleaner, offering adjustable pressure control from 1000 to 4000 psi. Tackle a heavy-duty job with ease. It boasts an impressive 3x speed in coverage compared to rivals, ensuring efficiency like never before. Safety is paramount, with advanced features like a front wheel lock to prevent rolling. Switch effortlessly between rotor and wand through a simple handle turn. Packing up is a breeze with the foldable handle, while the 24" precision-made surface cleaner, hose reel, and large wheels add practicality.

Ideal For

- Heavy duty cleaning
- Versatile cleaning
- Vertical and horizontal cleaning
- Cleaning outdoor areas including tennis courts, parking lots, residential and commercial
- Cleaning driveways, paths and exterior surfaces
- Cleaning greasy workshop and floors
- Cleaning trucks and machinery



FEATURES



Adjustable Pressure from 1000 to 4000 PSI



Direct Drive Pump



13 HP Vanguard Engine (DPW4000)



Spray Gun and Wand




21 Inch (DPW2500) 24 Inch (DPW4000) Rotary Cleaner

Specifications 2500	
Dimensions (compact)	L 3ft 9in x W 1ft 10in x H 2ft 5in
Weight	145lbs
Hose length	50ft
Sound level at handle	92dBA
Engine	Pull start Honda GX200 air-cooled 4-stroke OHV or Vanguard 25V3
Fuel tank capacity	0.8G
Fuel	Unleaded 86 octane or higher
Pump	AR Triplex with gear reduction, internal bypass unloader, thermal release valve
Gallons per minute	2.5 GPM
Pressure range	1000-2500 psi
Rotary size	21in

Specifications 4000	
Dimensions (compact)	L 4ft 6in x W 2ft 1in x H 2ft 10in
Weight	222lbs
Hose length	50ft
Sound level at handle	92dBA
Engine	Vanguard 25V3
Fuel tank capacity	1.6G
Pump	AR Triplex with gear reduction, internal bypass unloader, thermal release valve
Gallons per minute	4.0 GPM
Pressure range	1000-4000 psi
Rotary size	24in

HOSE2GO

H2G-14

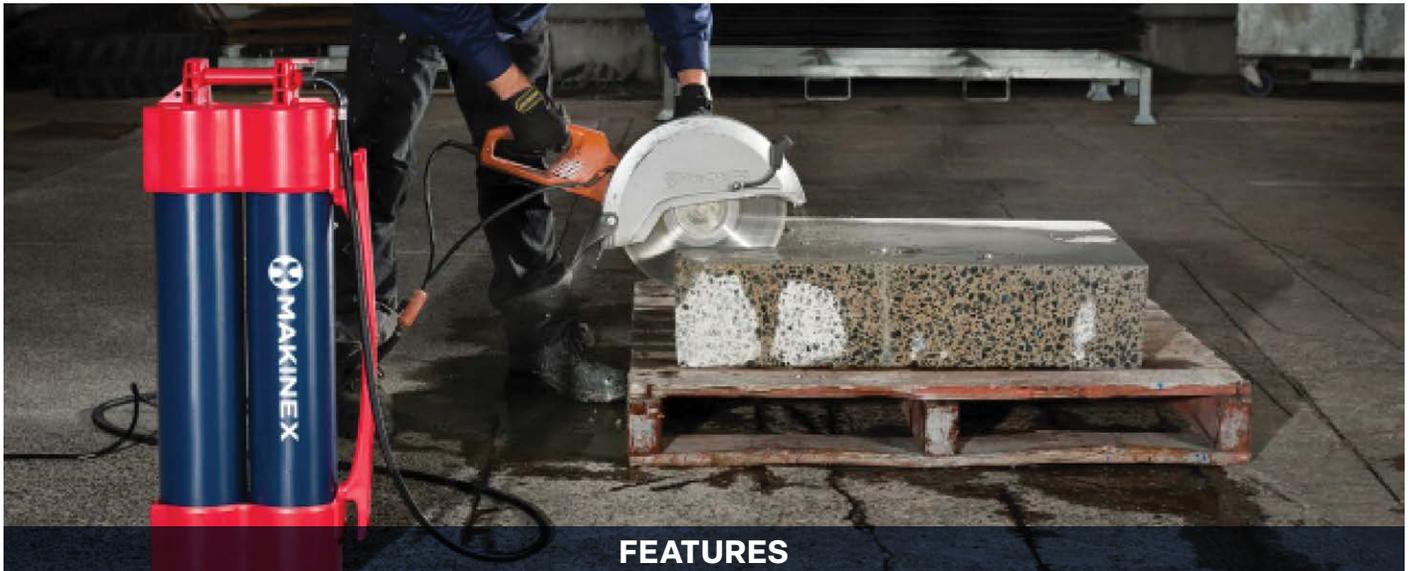

FEATURES



Concrete
Coring



Concrete
Cutting



Dust
Suppression



Portable
Pressurized
Water Supply



Blade Cooling

Constant Pressure Water Supply Unit Without a Battery or Pump

The ultimate portable pressurized water solution. Forget manual pumping and complicated electrics. This pumpless system delivers 3.6G of portable pressurized water (7-10 psi) for dust suppression, blade cooling, and more, for up to 30 minutes. No batteries, no electricity, no worries. Lightweight and ergonomic, offering two carry positions. It's not just a tool – it's a versatile solution for multiple convenience and compliance.

Specifications	
Dimensions	L 12.8in x W 5.7in x H 31.5in
Weight (dry)	12.6lbs
Weight (full)	43lbs
Full tank capacity	3.65gal
Continuous output pressure	7-10 psi

Inclusions

1. Spray gun
2. Hose 9.9'
3. Tap adaptor
4. Screw on quick connect hose fitting
5. Quick connect stop valve hose fitting
6. Strap attachment



SURFACE PREPARATION

CONCRETE GRINDER

CG-2050-US


A Robust Tool for Grinding, Polishing, and Finishing Concrete Surfaces

The Makinex Concrete Grinder is your go-to for grinding, polishing, and finishing concrete surfaces, offering exceptional adaptability. This grinder excels in leveling floors and with its removable magnetic shroud insures flawless edge grinding. CE certified and equipped with power-off and overloading protections, it's a reliable choice. The outlet port accommodates vacuum attachment, maintaining a clean environment. Compatible with standard 7.1 in diamond or resin grinding discs, this tool effortlessly removes surface coatings like epoxy and paint from concrete floors.

Specifications	
Dimensions	L 15.1in x W 12.1in x H 8.9in
Net weight	14.6lbs
Each package includes:	1x 50-grit polishing disc & 1x 40-grit abrasive diamond grinding disc (disc grit and size)
Motor	110V/60HZ/1900W/17Amp
RPM	3000 rpm (loaded)

Compatible with 7" grinding (arbor) and polishing discs (velcro), non-threaded.

Inclusions

 Allen Key	 Dust Skirt
 Polishing and Grinding Discs	 Vac Port Attachment
 Wire Type Wrench	



Ideal For

- Polishing
- Concrete grinding
- Finishing concrete surfaces
- Leveling floors
- Precise edge grinding



FEATURES



Removable Dust Cover for Edge Grinding



Power Off and Overload Protection



Vacuum Outlet Port



Variable Speed and Trigger Lock



Compatible with 7.1 inch Diamond and Resin Grinding Discs



Ergonomically 2-Handed Controls Constant Pressure

MS-100 MIXING STATION

MS-100 | MS-M-US

Portable, Fast and Easy Flooring Materials Mixing Station

Elevate your flooring process with the Makinex Mixing Station MS100. Mix 4 x 50lb bags in 3 minutes for precise pouring and less waste. Save time, labor, and costs while ensuring an ergonomic and lightweight experience. Say goodbye to spills with the removable lid and enjoy easy clean-up.

- Perfect mix and pouring every time
- Mix 4 x 50lb bags in 3 minutes
- Save time and money



Specifications	Mixing Station
Height handle attached (operating)	42-51in
Height handle detached (transport)	31in
Overall width	21in
Overall length	25in
Length of handle adjustment	10in
Weight (without stirrer/mixer)	40lbs

Specifications	Mixer
Weight (w/o paddle)	11lbs
Voltage	120v
Watts	1800W
Amps	18 (full load)
Speeds	2
RPM Range (variable)	1 st gear 150-300 rpm 2 nd gear 300-650 rpm

Ideal For

- Flowable materials
- Mixing epoxies and self-leveling cements
- Plasterers
- Concreters
- Floor preparation



Station and mixer sold separately

FEATURES



FEATURES



Removable Dust Splash and Bucket



Easy Tilt Operation for Precision Pouring

MS-150 MIXING STATION

MS-150-US | MS-M-US-2200

Portable, Fast and Easy Flooring Materials Mixing Station

Large, portable, fast and easy flooring materials mixing station redefining flooring mixing, the MS150 Mixing Station is a portable powerhouse. Mix 5 x 50lb bags in 7 minutes while ensuring precise pouring and reduced waste. Save time and labor while relishing an ergonomic lightweight design that curbs operator fatigue and injury. With a removable vacuum attachment for spills and dust suppression, achieve meticulous mixing and pouring within the single unit.

- Perfect mix and pouring every time
- Mix 5 x 50lb bags in 7 minutes
- Save time and money

Specifications	Mixing Station
Height handle attached (operating)	42.7in – 52.2in
Height handle detached (transport)	40.7in
Overall width	24.1in
Overall length	29.1in
Length of handle adjustment	9.56in
Weight (without makinex electric mixer and helix paddle)	48.5lbs
Weight (with makinex electric mixer and helix paddle)	72.75lbs

Specifications	Mixer
Weight	14.3lbs
Voltage	120v
Watts	2040W
Speeds	2
RPM Range (variable)	1 st gear 150-300 rpm 2 nd gear 300-650 rpm

Ideal For


- Flowable materials
- Mixing epoxies and self-leveling cements
- Plasterers
- Concreters
- Floor preparation



FEATURES



Hose Connector

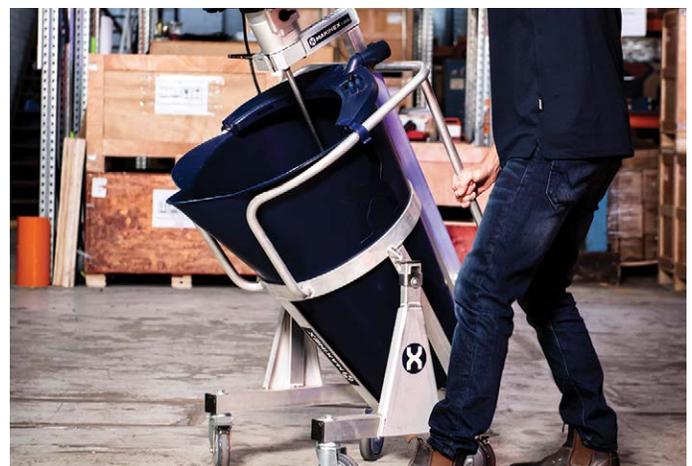

Easy Tilt Operation for Precision Pouring

FEATURES



Ergonomic



Lightweight



Mixes
5 Bags

2040W Mixer included with Station

JACKHAMMER TROLLEY

JHT-U-2

A Versatile Demolition Tool that Removes Floor Tiles, Hardwood, and Mortar Beds

Demolish with unmatched speed. Rip through ceramic tiles, thinset, and more up to 6 times faster. The innovative design reduces impact and fatigue, with 80-degree angles across 5 settings. Streamlined and robust, the trolley boasts an easy-to-use spring and brake lever for angle adjustments and an inbuilt dampening system that minimizes impact, vibration, injury risk, and muscle fatigue.

Specifications

Weight (trolley without jackhammer)	60.6lbs
Dimensions (trolley without jackhammer)	L 3ft 3in x W 1ft 3 in x H 12 in
Suitable for 35lb-42lb jackhammer models	Bosch 11335K, Hilti TE1000, Hilti TE1500, Makita 1307, 1317, 1520, 1512 and Bauer 1632E-B

Accessories



Tile Smasher Blade,
TSH-B



Universal Block Set
JHTB-U-2



Handle Grips
MAK-UP-10-V2



Brake Lever and Cable
JHT-99-63-V2




Tile Smasher
Attachment Bolts
TSH-BS-V2-KIT



Vacuum Attachment
JHT-VA-01-00



Jackhammers
sold separately

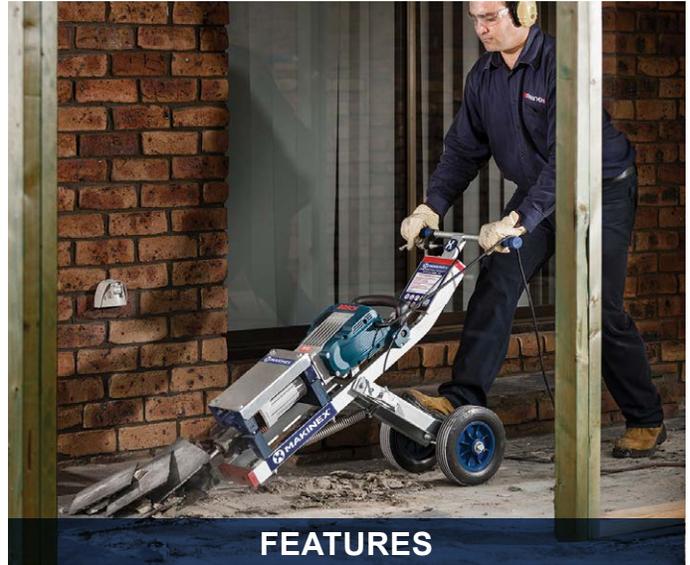

FEATURES

6x

Faster

6x Faster –
Demolish Up to
6x Faster



6 Different
Positions, Ranging
from 20-80 Degrees



Reduce Injury
and Back Strain




TILE SMASHER HEADS AND ACCESSORIES

Precise Demolition Tools for the Fast and Efficient Removal of Tiles, Mortar Beds, and More

The Makinex Tile Smasher Head and accessories are expertly engineered for the fast and efficient removal of tiles, mortar beds, and more. Designed for use with breakers up to 42 lbs it pairs seamlessly with the Makinex Jackhammer Trolley, offering enhanced productivity while minimizing user fatigue.

For lighter handheld breakers up to 22 lbs, the SDS Plus and SDS Max options deliver exceptional versatility and precision. All versions feature a high-tensile steel head, replaceable blades, and a secure tapered locking mechanism.

Additionally, the Flippable Wide Chisel accessory is designed for maximum durability, making it the perfect companion for demanding demolition tasks on both concrete and wooden surfaces.

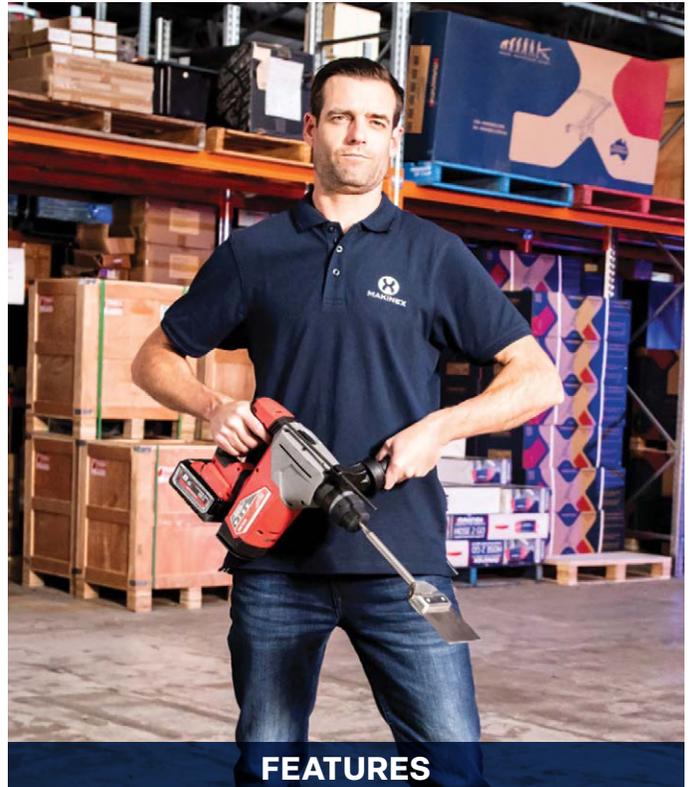

Ideal For

- Construction
- Renovators
- Rental
- Demolition



SDS Max and Plus Options



High-Tensile Steel head with Replaceable blades

Demolition Products



Tile Smasher Head, with 11/8" HEX Shank Combo V2
TSHC-SS-US-V2



Tile Smasher Attachment Bolts,
TSH-BS-V2-KIT



SDS Max
TSH-SDS-MAX



SDS Plus
TSH-SDS-PLUS



Tile Smasher Head, with Hilti HEX Shank Combo V2
TSHC-HS-US-V2



Tile Smasher Blade
TSH-B



Flippable 1/4" Wide Chisel
WCUS-420



SDS Blade and Bolt Kit
TSH-SDS-B-KIT

POWERED HAND TRUCK (PHT)

PHT2-140-US

The Ultimate Materials Handling Lift & Load Solution

Raise your lifting game. With a solo 309lbs lift capacity, it's your partner in workshops, warehouses, and beyond. Battery-powered for up to 50 cycles per charge, it eliminates fatigue and risky two-person lifts. Goodbye costly forklifts and licenses. Foldable and portable, it's your go-anywhere lifting solution. Charge up, lift more, and transform how you work safely.

- Solo lift up to 309lbs
- Battery powered with up to 50 lifts per cycle
- Reduce back injuries and operator fatigue

Ideal For

- Workshops
- Warehouses
- Factories and depots
- Rental
- Distribution companies



FEATURES



**Solo Lift
Up to 309lbs**



**Battery Powered
with Up to
50 Lifts Per Cycle**



**Portable,
Fold Flat**

Specifications

Machine weight	Total 88lbs handle end – 33lbs wheel end – 55lbs
Weight of fork attachment only	26.5lbs
Maximum lift capacity	Up to 309lbs
Lift range / height (of hook attachment)	Ground level up to 6ft 2in
Lift range / height (of fork attachment)	Ground level up to 6ft2in
Folded dimensions	L: 6ft 6in x W: 2ft 4in x H: 10.4in
Linear actuator power	12V DC, 25 amp
Lift cycles per charge	Approx. 50 lift cycles



Accessories



Fork
PHT2-FA-00



Big Wheels
PHT2-09R, PHT2-09L



Nose Extension
PHT2-08




Glass Sucker
PHT2-GS-00



Sling
PHT2-SA-00

MOBILE CHARGE POD (MCP)

MCP-6-SS-US

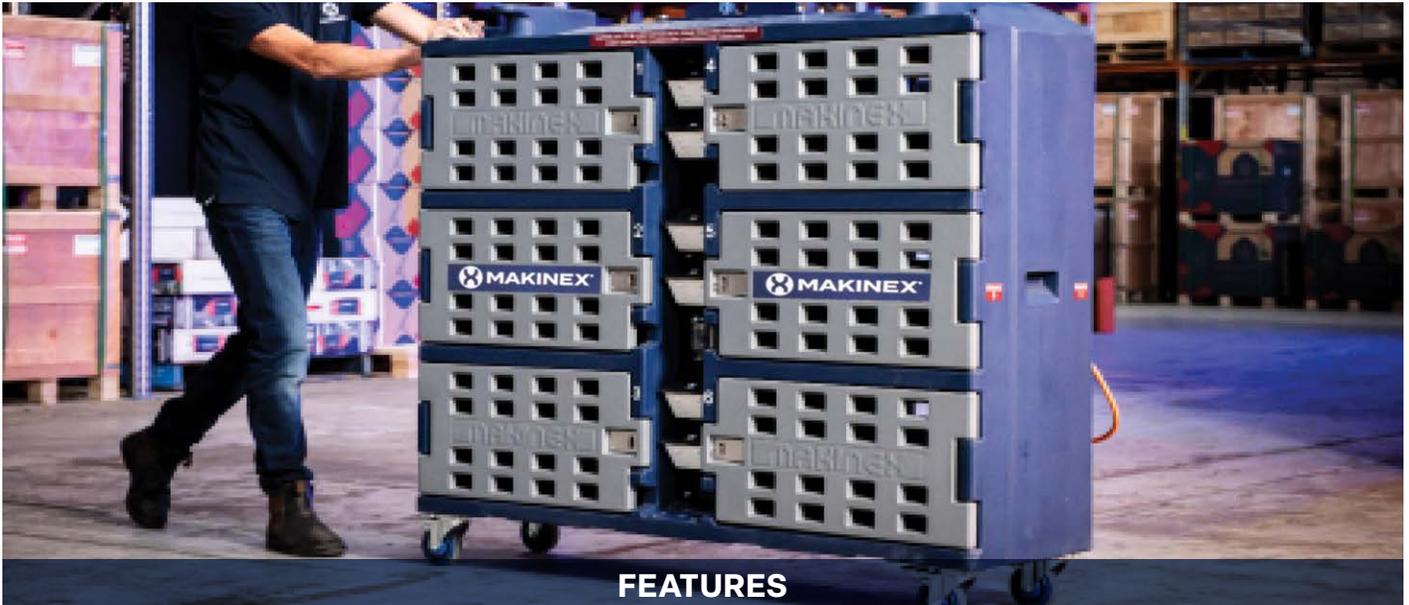

FEATURES



6x Secure Lockers



Lightweight



Large Inspection Holes



IP33 Rated



Single 15A Supply



Air Ventilation

Safe, Fire Retardant On-Site Battery Storage and Charging

Redefining on-site battery storage and charging. The Mobile Charge Pod offers a safe haven for your power products, providing a simple and organized solution for contractors and tradespeople. With 6 easy-to-use lockers accommodating various tool and battery types, it's a fire-resistant design crafted by and for Tier 1 Contractors that will relieve stress from equipment loss and battery downtime. Lightweight yet robust, it surpasses metal lockers, with forklift pockets for transportation convenience.

Ideal For

- Construction
- Rental
- Jobsites
- Service/repair shops
- Automotive shops
- Safe and compliant storage (AS/NZS 3190 and AS/NZS 3012 as a portable socket outlet assembly (PSOA))

Benefits

- Fire retardant
- Easy-to-use GFCI protected lockers
- Protected GPO for each locker

Specifications

Size	58.3in x 17in x 54in
Weight	163.1lbs
Dimensions at the front of locker	22.8in x 13in x 14.6in
Socket outlets	1 15A GFCI per locker
Material	Super tough, UV stabilised & V2 fire rated polyethylene
IP Rating	IP33
Compliance suitable for construction sites	AS/NZS 3190 and AS/NZS 3012 as a portable socket outlet assembly (PSOA)



PORTABLE POWER BOX (PPB) SERIES

PPB-6-15-US MAX | PPB-6-15-US-B BATES



PPB 6-15



PPB-6-15

FEATURES



Highly Portable



Single Phase



Quick Charge



AC and PV Charging Inputs

Portable Power Box (PPB) Solution

The Makinex Portable Power Box (PPB) series is a versatile range of high-capacity, portable power storage devices designed for various industries and applications. Emissions-free and whisper-quiet, these units provide reliable power for both indoor and outdoor use without the need for fuel.

Each PPB model is equipped with advanced safety features, such as RCD protection, touch-safe solar PV connectors, thermal overload protection, and a battery management display. With plug-and-play power plugs, USB-A and USB-C (quick charge 5V-3A) outlets, and easy transportability, the PPB series delivers safe, clean power wherever and whenever needed.

Whether for concrete cutting, mobile catering, event management, film production, emergency backup, or confined space applications, the Makinex PPB series offers tailored solutions to meet diverse power needs.

Ideal For

- Indoor environment
- Outdoor environments
- Events
- Construction
- Mining
- Film studios



PPB 6-15



PPB 6-15 Bates

Specs	PPB 6-15	PPB 6-15 Bates
Power Output	6kW	6.5kW
Battery size	15kWh	15kWh
Outlets	30A-120V/240VAC & 20A 120VAC, USB-A/ USB-C 5V-3.0A	2 x Dual 20A 120V GFCI, 1 x L5-30R 30A 120V, 1 x stage pin 60A 120V (50A Max), USB-A / USB-C, 5V 3.0A
Inlet	15A – 120VAC (trickle charge), 20A – 240VAC (fast charge) and 4kW solar	1 x 5-15P 15A 120V, 1 x stage pin 60A 120V (50A Max), 8kW solar
Charging time	100% 120V – 9hrs 100% 240V – 3hrs	100% 240V – 9hrs 100% 120V – 3hrs
Peak surge	12 kW 5 seconds	13kW 5 seconds
Dimensions	38.4 L x 20.3 W x 36.7 H in	38.4 L x 20.3 W x 36.7 H in
Weight	488lbs	474lbs

GENERATORS

GEN-32P-US-V2 | GEN-23P-MS-480 | GEN-23P-MS-240
 GEN-16P-MS-480 | GEN-16P-MS-240



FEATURES



Electric Key Start



Single Phase Sockets



Three Phase Sockets



Large Fuel Tanks



Highly Portable

Most compact generators on the market

15% more power from the same engines

Three phase and single-phase capacity

Easy to position near work area

32kW 480V Dual Phase World's Smallest

- Compact, no tow-behind
- Radial flux alternator
- 13.2G fuel tank
- RCD protection



Receptacle Connections

Outlets Provided	16kW 240V	16kW 480V	23kW 240V	23kW 480V	32kW 480V
50A Three-Phase	 CS8369		 CS8369	 CS8169	 CS8169
50A Three/Single Phase	 CS6369		 CS6369		
30A Three-Phase		 L22-30R		 L22-30R	 L16-30R
50A Three/Single Phase	 L14-30R	 L16-30R	 L14-30R	 L16-30R	
20A Single-Phase	 20A GFCI	 20A GFCI	 20A GFCI	 20A GFCI	 2x 20A GFCI

Specifications

Voltage	110V single phase, 480V three phase
Frequency	60HZ
3ø three phase power	Max: 28 kW / continuous: 25.2 kW [†]
1ø single phase power (aux)	Max: 2.2 kW / continuous: 2 kW [†]
3ø three phase max amps	Max: 33.8 A / continuous: 30.55 kW [†]
1ø single phase max amps (aux)	Max: 20A / continuous: 18A [†]
Dry weight	772lbs
Noise level (7m)	72-76dB
Engine type	Twin cylinder air cooled petrol
Engine model	Honda GX690 X 2
Starting system	Electric key start
Displacement	1376CC
Fuel economy	2.6gal @ 50% LOAD
Fuel tank	13.2G
Dimensions	43 in (L) x 24.8 in (W) x 40.3 (H)

[†] max cumulative power and current across provided sockets

16kW 240V Dual Phase Highly Portable

- Compact, no tow-behind
- Radial flux alternator
- 9.0G fuel tank
- GFCI protection



Specifications

Voltage	120V single phase, 240V three phase
Frequency	60HZ
3Ø three phase power	Max: 16.8kW / continuous: 15 kW [†]
3Ø three phase amps	Max: 40 A / continuous: 36A [†]
1Ø single phase amps	Max: 23A / continuous: 20A [†]
Dry weight	342lbs
Noise level (7m)	NO LOAD - 72dB
Engine type	Twin cylinder air cooled petrol
Engine model	Honda GX690
Starting system	Electric key start
Displacement	688CC
Fuel economy	0.92gal @ 50% LOAD
Fuel tank	9.0G
Dimensions	30.4 in (L) x 20.8 in (W) x 35.5 in (H)

16kW 480V Dual Phase Highly Portable

- Compact, no tow-behind
- Radial flux alternator
- 9.0G fuel tank
- GFCI protection



Specifications

Voltage	110V single phase, 480V three phase
Frequency	60HZ
3Ø three phase power	Max: 13 kW / continuous: 11.5 kW [†]
1Ø single phase power (aux)	Max: 2.2 kW / continuous: 2 kW [†]
3Ø three phase amps	Max: 16.9 A / continuous: 15A [†]
1Ø single phase amps	Max: 30A / continuous: 30A [†]
Dry weight	342lbs
Noise level (7m)	NO LOAD - 72dB
Engine type	Twin cylinder air cooled petrol
Engine model	Honda GX690
Starting system	Electric key start
Displacement	688CC
Fuel economy	0.92gal @ 50% LOAD
Fuel tank	9.0G
Dimensions	30.4 in (L) x 20.8 in (W) x 35.5 in (H)

23kW 240V Dual Phase Compact & Powerful

- Compact, no tow-behind
- Radial flux alternator
- 13.2G fuel tank
- GFCI protection



Specifications

Voltage	120V single phase, 240V three phase
Frequency	60HZ
3Ø three phase power	Max: 22 kW / continuous: 20 kW [†]
3Ø three phase max amps	Max: 53 A / continuous: 48 A [†]
1Ø single phase max amps	Max: 30 A / continuous: 27.7 A [†]
Dry weight	573lbs
Noise level (7m)	NO LOAD - 72d
Engine type	Twin cylinder air cooled petrol
Engine model	VanGuard 61G277
Starting system	Electric key start
Displacement	993CC
Fuel economy	1.5gal @ 50% LOAD
Fuel tank	13.2G
Dimensions	43 in (L) x 25 in (W) x 40 in (H)

23kW 480V Dual Phase Compact & Powerful



- Compact, no tow-behind
- Radial flux alternator
- 13.2G fuel tank
- GFCI protection



Specifications

Voltage	110V single phase, 480V three phase
Frequency	60HZ
3Ø three phase power	Max: 25 kW / continuous: 22.5 kW [†]
1Ø single phase power (aux)	Max: 2.2 kW / continuous: 2 kW [†]
3Ø three phase max amps	Max: 30 A / continuous: 27 A [†]
1Ø single phase max amps (aux)	Max: 20 A / continuous: 18 A [†]
Dry weight	573lbs
Noise level (7m)	NO LOAD - 72d
Engine type	Twin cylinder air cooled petrol
Engine model	VanGuard 61G277
Starting system	Electric key start
Displacement	993CC
Fuel economy	1.5gal @ 50% LOAD
Fuel tank	13.2G
Dimensions	43 in (L) x 25 in (W) x 40 in (H)


CONNECT WITH MAKINEX

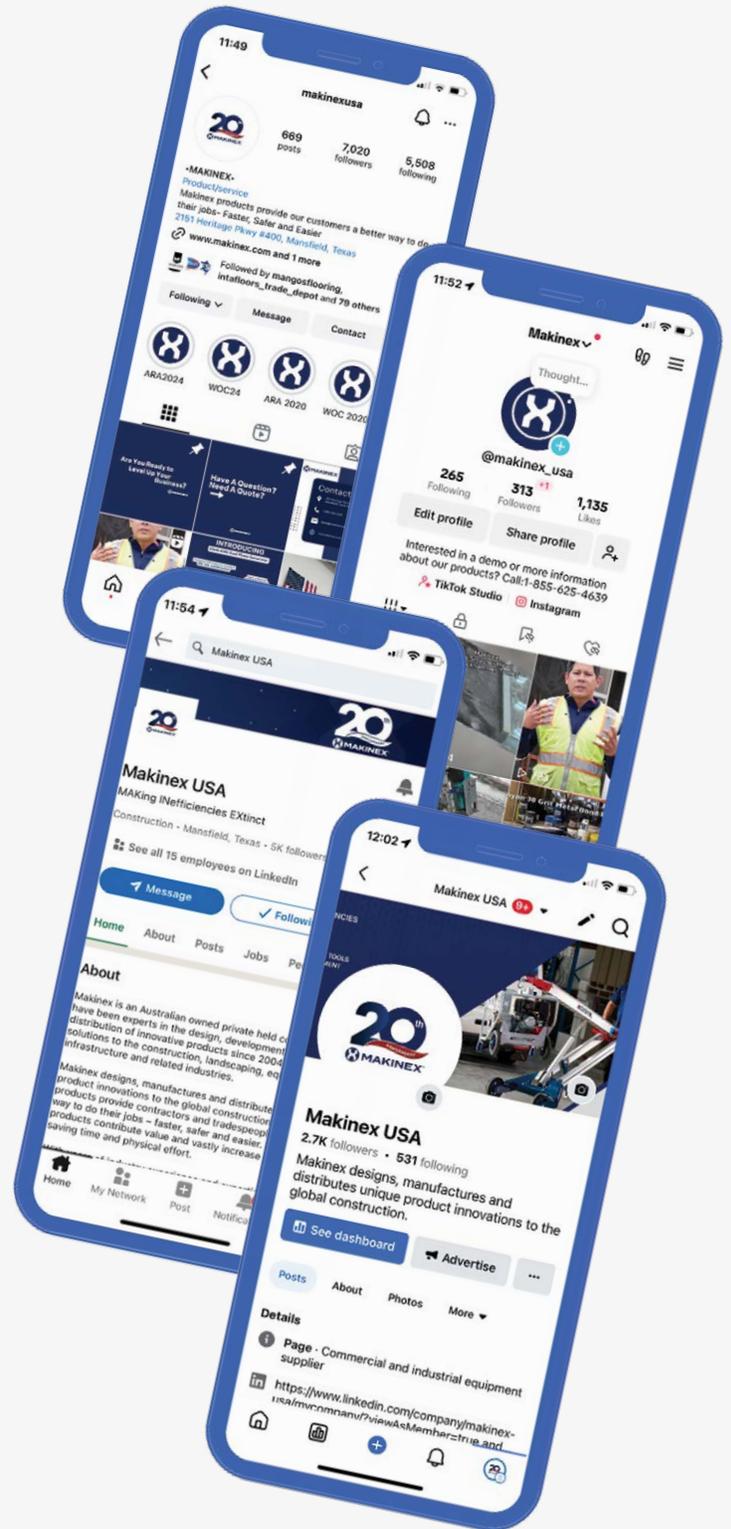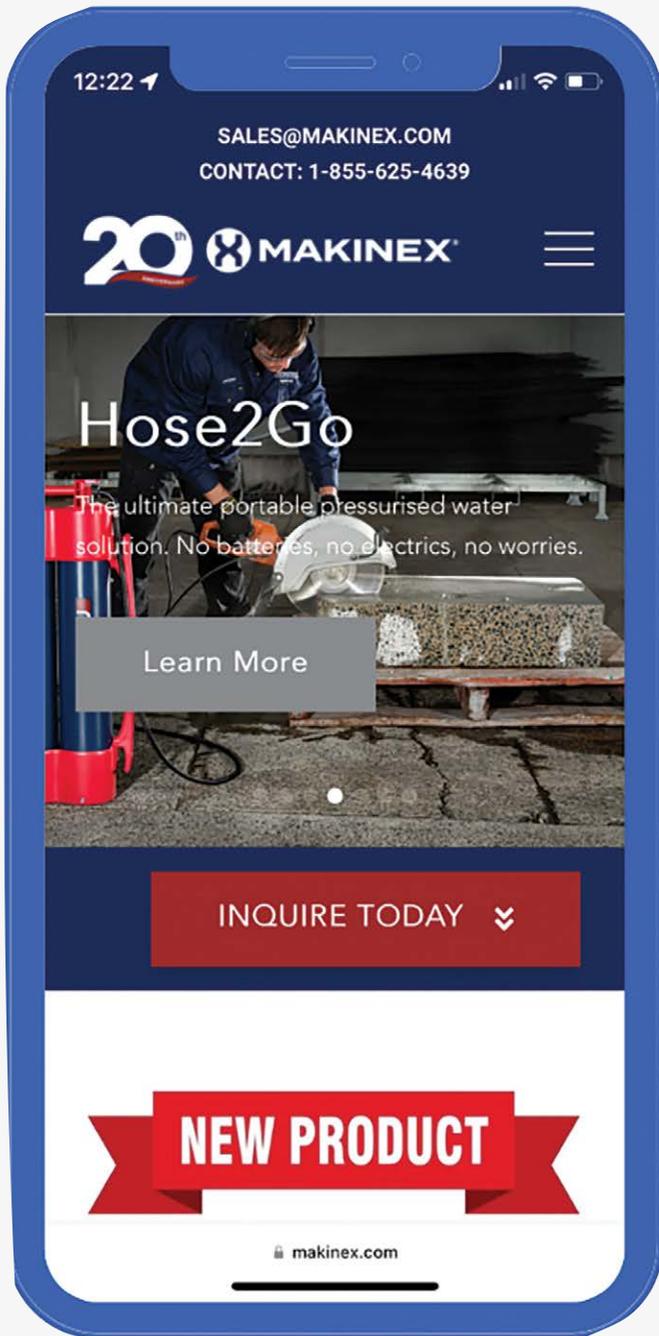

Connect with Makinex on social media

OUR AWARDS

Makinex has been recognized for its commitment to innovation and excellence in industry in the industry. Some of our notable awards include:

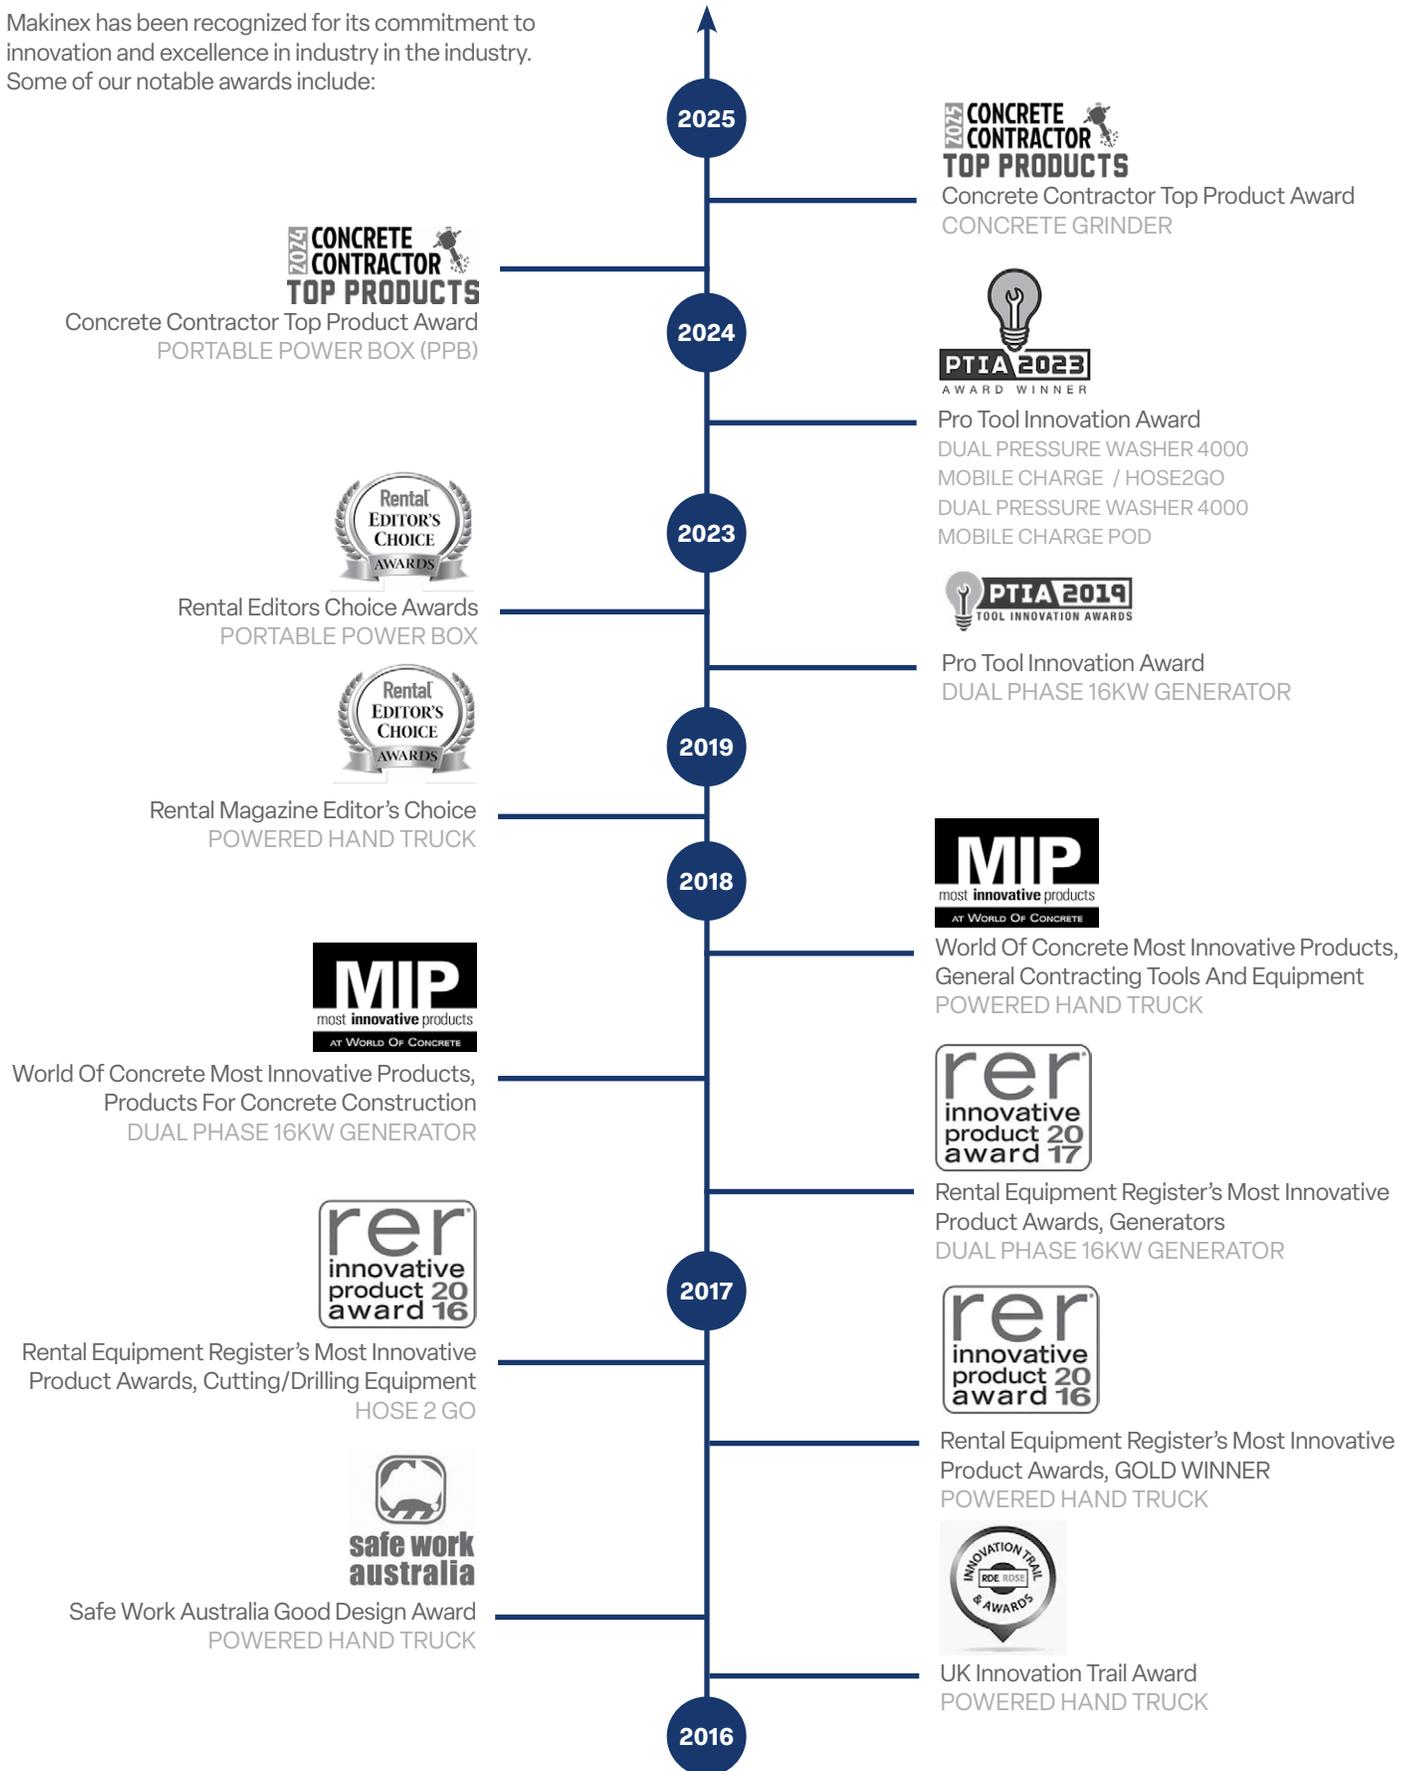



Our Mission

In every product we design, Makinex is on a mission to make inefficiencies extinct. In fact, this driving force is embedded in our name.

We strive for continuous improvement. Always looking for innovative, practical ways to make hard jobs easier for contractors and tradespeople. So they save time, reduce physical effort and make more money.



Scan this QR code to find out more



MAKINEX[®]

2151 Heritage Pkwy #400
Mansfield, TX 76063
Phone: 1-855-625-4639
Email: sales@makinex.com
www.makinex.com

Connect with us on



Products are correct at time of printing but are subject to change without notice.