

PETROL GENERATORS

Compact, Portable and Maneuverable

THE MOST COMPACT GENERATORS on the market with 15% more power. They can deliver 3 phase and single phase power at the same time. With less than 3% total harmonic distortion they are ideal for high-frequency applications.

CHALLENGE ON THE JOB?

- Having power near to where I am working
- Combining 3 and single phase outlets
- Being easy to move on and off vehicles
- Tight access

SOLUTIONS

- ✓ Most compact portable generator on market
- ✓ Provides dual phase option
- ✓ Handy lifting eye or ramp loadable
- ✓ Easy to position near working area

AVAILABLE MODELS

GEN-10P SPECIFICATIONS

Max output	10kVA/8kW
Frequency	50Hz
Voltage	240V/415V
Rated output	6400W
Sockets	Sockets 2 x 15A single phase + 1 x 20A 3 phase sockets with RCBO protection
DRY Weight	100kg
Noise level (7m)	No load - 72dB 50% load - 76dB 100% load - 78dB
Engine	Honda GX-390
Starting system	Pull start
Fuel economy	2.4 L/h @ 50% load
Dimensions	598mm (23in) [L] x 609mm (24in) [W] x 1162mm (46in) [H]



PARALLEL BOX SPECIFICATIONS

Frequency	50Hz	Plugs	32A IP67 5 Pin with Heavy Duty cable x 2
Voltage	240/415V		
Outlets	2 x 32A IP67 5 Pin three phase 1 x 15A 3 Pin IP67 single phase with RCD and Circuit Breaker protection	Housing	IP65 Heavy Duty Poly Carb
		Dimensions	370 (W) x 340 (D) x 300 (H)
		Weight	12kg LED lights IP 56



GEN-16P SPECIFICATIONS

Max output	16kVA/19kW
Frequency	50Hz
Voltage	240/415V
Rated output	12,800W
Sockets	2x15A Single Phase or 32A 3-phase sockets with RCBO protection
DRY Weight	155kg
Noise level (7m)	No Load - 72dB 50% Load - 76dB 100% Load - 78dB
Engine	GX-690
Starting system	Electric/Key Start
Fuel economy	3.5 L/h @ 50% load
Dimensions	773mm (30in) [L] x 530mm (21in) [W] x 902mm (36in) [H]



GEN-23P SPECIFICATIONS

Max output	23kVA/19kW
Frequency	50Hz
Voltage	240/415V
Rated output	20,00W
Sockets	2x15A Single Phase or 32A 3-phase sockets with RCBO protection
DRY Weight	240kg
Noise level (7m)	50% Load - 80dB
Engine	Vanguard EF1 37hp
Starting system	Electric/Key Start
Fuel economy	5.6 L/h @ 50% load
Dimensions	1105mm (43.5in) [L] x 632mm (24.8in) [W] x 1024mm (40.3in) [H]



RFL - permanent magnet alternator

GEN-10P 10Kva

ACCESSORIES

1



1. Rubber feet

2



2. Rubber Handle grips

3



3. Generator Adapter Plug
20A - 32A

4



4. Machine Adapter Plug
with breaker 32A - 20A


Please refer to page 19 for part numbers

Extremely manouverable. We ran a 3 phase grinder, a single phase grinder and a vacuum all at the same time.

Jason, Concrete Artisans

PARALLEL BOX

GEN-10P
&
GEN-16P
WITH
PARALLEL
BOX

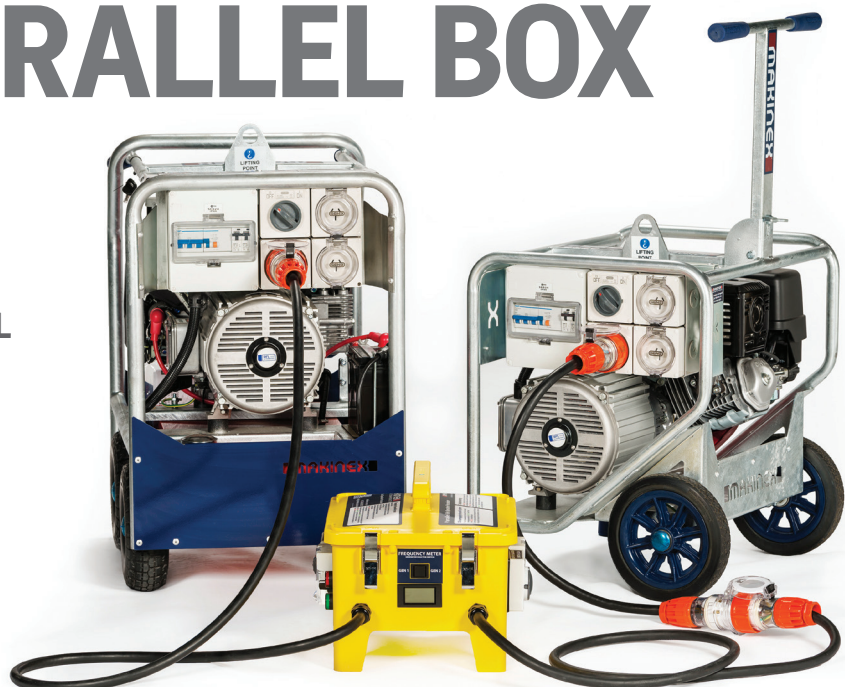

>> Visit our website to see the Generators in use

1300 795 953 · www.makinex.com.au